



Dairy-Pro® RO and NF POLISHING ELEMENTS

Reverse Osmosis and Nanofiltration 8" Sanitary Element

PRODUCT DESCRIPTION

Membrane Chemistry: Proprietary TFC® polyamide
 Membrane Type: RO - high rejection reverse osmosis
 NF-200 - selective rejection nanofiltration
 Construction: Sanitary spiral wound elements with net outerwrap and attached ATD's with two BAND-TITE® reinforcement straps
 Regulatory Status: Compliant with US FDA CFR Title 21, EC Reg. No. 1935/2004, and EU Reg. No. 10/2011. Halal-certified by the Islamic Food and Nutrition Council of America (IFANCA). All spiral element components in contact with the process fluid have passed USP Class VI guidelines.

NOMINAL PERFORMANCE


Part Number	Model	Active Membrane Area ft ² (m ²)	Feed Spacer mil (mm)
8882260	8040-RO-30	371 (34.5)	31 (0.8)
8882266	8040-NF-200-30	371 (34.5)	31 (0.8)
8882267	8040-NF-200-45	290 (26.9)	45 (1.1)

OPERATING AND DESIGN INFORMATION*

Maximum Operating Pressure: 650 psi (44.8 bar)
 Maximum Pressure During Cleaning: 150 psi (10.3 bar)
 Operating Temperature Range: 40°-122°F (5-50°C)
 Maximum Cleaning Temperature: 122°F (50°C)
 pH Range - Continuous Operation: 4.0-10.0
 pH Range - Clean-In-Place (CIP): 1.8-11.0
 Design Pressure Drop Per Element: 3-6 psi (0.2-0.4 bar)
 Design Pressure Drop Per Vessel: 15-35 psi (1.0-2.4 bar)

* Consult KMS Process Technology Group for specific applications.

NOMINAL DIMENSIONS

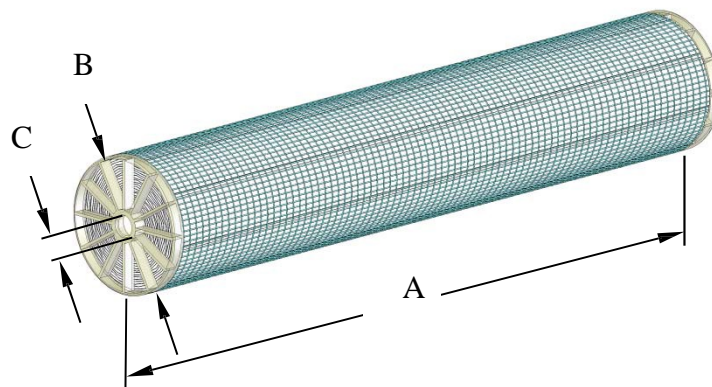

Model	A* inches (mm)	B inches (mm)	C inches (mm)
All models	40.0 (1,016)	7.9 (201)	1.125 (28.6)

* Including two integral anti-telescoping-devices (ATD's)

Membrane Characteristics:

Dairy-Pro® RO reverse osmosis elements are selected when high rejection to organic and inorganic material is the objective. Dairy-Pro® NF nanofiltration elements are selected when high rejection to organic matter is the objective, while high passage of salts is required for deashing.

Operating Limits:

- **Operating Pressure:** The maximum operating pressure for the Dairy-Pro® RO and NF element is listed in the first page of this document. Actual operating pressure is dependent upon system flux rate (appropriate for feed source) as well as feed, recovery and temperature conditions.
- **Permeate Pressure:** Permeate pressure should not exceed baseline (concentrate) pressure at any time (including online, off-line and during transition). Reverse pressure will damage the module.
- **Differential Pressure:** Maximum differential pressure limit is 6 psi (0.4 bar) per element. Maximum differential pressure for any length vessel is 35 psi (2.4 bar).
- **Temperature:** Maximum operating and cleaning temperature is 122°F (50°C).
- **pH:** Allowable range for continuous operation is 4.0 to 10.0. Allowable range for cleaning is 1.8 to 11.0.

Water Quality for Cleaning & Diafiltration:

- **Turbidity and SDI:** Maximum feed turbidity is 1 NTU. Maximum feed Silt Density Index (SDI 15-minute test) is 5.0.
- **Guidelines:** Please refer to the KMS "Water Quality Guidelines for CIP and Diafiltration" for more detailed information.

Chlorine and Chemical Tolerance:

- KMS recommends removing residual free chlorine prior to membrane exposure to prevent premature membrane failure.
- Sodium metabisulfite (without catalysts such as cobalt) is the preferred chemical to eliminate free chlorine or similar oxidizers in the feed.

Cationic Polymers and Surfactants:

Dairy-Pro® RO and NF membranes may be irreversibly fouled if exposed to cationic (positively charged) polymers or surfactants. Exposure to these chemicals during operation or cleaning is not recommended and will void the warranty.

Lubricants:

For element installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and will void the warranty.

Supplemental Technical Bulletins:

- RO/NF Module Cleaning Procedures
- Water Quality Guidelines for CIP and Diafiltration

Service and Ongoing Technical Support:

Koch Membrane Systems (KMS) has an experienced staff of professionals available to assist end-users and OEM's for optimization of existing systems and support with the development of new applications. Along with the availability of supplemental technical bulletins, KMS also offers a complete line of KOCHKLEEN® cleaning and maintenance chemicals.

KMS Capability

KMS is the leader in crossflow membrane technology, manufacturing reverse osmosis, nanofiltration, microfiltration, and ultrafiltration membranes and membrane systems. The industries we serve include food, dairy and beverage, semiconductors, automotive, water and wastewater, chemical and general manufacturing. KMS adds value by providing top quality membrane products and by sharing our experience in the design and supply of thousands of crossflow membrane systems worldwide.

The information contained in this publication is believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance. We assume no responsibility, obligation or liability for results obtained or damages incurred through the application of the information contained herein. Refer to Standard Terms and Conditions of Sale and Performance Warranty documentation for additional information.

Koch Membrane Systems, Inc., www.kochmembrane.com

Corporate Headquarters: 850 Main Street, Wilmington, Massachusetts 01887-3388 USA. Tel.: 1-888-677-KOCH.

For related trademark information, visit www.kochmembrane.com/legal
Koch Membrane Systems, Inc. is a Koch Chemical Technology Group, LLC company.

© 2018 Koch Membrane Systems, Inc. All rights reserved worldwide.

10/18 Rev 18-1