



HFK-131 FOOD & DAIRY UF ELEMENTS

Ultrafiltration 4", 6" and 8" Spiral Element Series

PRODUCT DESCRIPTION

Membrane Chemistry: Proprietary semi-permeable polyethersulfone (PES)
Membrane Type: HFK-131 with observed separation range of 10,000 Daltons
Construction: Sanitary spiral wound element with net outer wrap
Regulatory Status: Compliant with US FDA CFR Title 21, EC Reg. No. 1935/2004, and EU Reg. No. 10/2011. Halal-certified by the Islamic Food and Nutrition Council of America (IFANCA)
Options:
Diameter: 3.8", 4.3", 6.3", 6.4", 7.8", 8.0" or 8.3"
Length: 33", 35.5", or 38"
Feed Spacer: N (31 mil), V (46 mil), H (62 mil), or F (80 mil), D (100 mil)
Outer wrap: Controlled (e.g. NYV) or trimmable (e.g. NYT)

SPECIFICATIONS

Model	Active Membrane Area									
	NYV/T Spacer (31 mil)		VYV/T Spacer (46 mil)		HYV/T Spacer (62 mil)		FYV/T Spacer (80 mil)		DYV/T Spacer (100 mil)	
	ft ²	(m ²)	ft ²	(m ²)	ft ²	(m ²)	ft ²	(m ²)	ft ²	(m ²)
3838 HFK-131	72	(6.7)	58	(5.4)	45	(4.2)	-	-	-	-
4333 HFK-131	93	(8.6)	73	(6.8)	55	(5.1)	44	(4.1)	-	-
4336 HFK-131	95	(8.8)	79	(7.3)	59	(5.5)	-	-	-	-
4338 HFK-131	102	(9.5)	81	(7.5)	-	-	-	-	-	-
6338 HFK-131	228	(21.2)	180	(16.7)	142	(13.2)	119	(11.1)	102	(9.5)
6438 HFK-131	228	(21.2)	180	(16.7)	142	(13.2)	119	(11.1)	-	-
7838 HFK-131	340	(31.6)	270	(25.1)	-	-	-	-	-	-
8038 HFK-131	358	(33.2)	280	(26.0)	215	(20.0)	-	-	-	-
8338 HFK-131	405	(37.6)	308	(28.6)	241	(22.4)	-	-	-	-


6438 and 7838 elements are only available in controlled configuration. 6338 elements are only available in trimmable configuration.

OPERATING AND DESIGN INFORMATION*

Typical Operating Pressure: 30 - 120 psi (2.1 - 8.3 bar)
Maximum Operating Pressure: 140 psi (9.7 bar)
Operating Temperature Range: 41 - 131°F (5 - 55°C)
Cleaning Temperature Range: 105 - 122°F (40 - 50°C)
Allowable pH - Continuous Operation: 2.0 - 10.0
Allowable pH - Clean-In-Place (CIP): 1.8 - 11.0
Design Pressure Drop Per Element: N spacer: 12-15 psi (0.8-1.0 bar)
V spacer: 15-20 psi (1.0-1.4 bar)
H or F spacer: 15-25 psi (1.0-1.7 bar)
Design Pressure Drop Per Vessel (3 in series): N spacer: 36-45 psi (2.5-3.1 bar)
V spacer: 45-60 psi (3.1-4.1 bar)
H or F spacer: 45-75 psi (3.1-5.2 bar)
Design Pressure Drop Per Vessel (4 in series): N spacer: 48-60 psi (3.3-4.1 bar)
V spacer: 60-68 psi (4.1-4.7 bar)

* Consult KMS Process Technology Group for specific applications.

NOMINAL DIMENSIONS

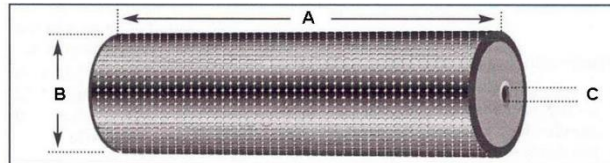

Model	A inches (mm)	B inches (mm)	C inches (mm)
3838 HFK-131	38.0 (965)	3.8 (96)	0.831 (21.1)
4333 HFK-131	33.0 (838)	4.3 (109)	0.831 (21.1)
4336 HFK-131	35.5 (902)	4.3 (109)	0.831 (21.1)
4338 HFK-131	38.0 (965)	4.3 (109)	0.831 (21.1)
6338 HFK-131	38.0 (965)	6.3 (160)	1.138 (28.9)
6438 HFK-131	38.0 (965)	6.4 (162)	1.138 (28.9)
7838 HFK-131	38.0 (965)	7.7 (197)	1.138 (28.9)
8038 HFK-131	38.0 (965)	7.9 (201)	1.138 (28.9)
8338 HFK-131	38.0 (965)	8.3 (211)	1.138 (28.9)

Note: Not all combinations are available.

Membrane Characteristics:

- The membrane used in these modules consists of a semipermeable polyethersulfone (PES) layer on a polyester backing material.
- Pure water flux of these PES HFK-131 membranes is 1.0-2.2 gfd/psi (24-53 l/m²/h/bar) at 77°F (25°C).

Operating Limits:

- **Operating Pressure:** Maximum operating pressure is 140 psi (9.7 bar).
- **Permeate Pressure:** Permeate pressure should not exceed baseline (concentrate) pressure at any time (including on-line, off-line and during transition). Reverse pressure will damage the membrane.
- **Differential Pressure:** The maximum differential pressures per element are listed on the front of this document, including design values for multi-element housings.
- **Temperature:** Maximum operating temperature is 131°F (55°C). Maximum cleaning temperature is 122°F (50°C).
- **pH:** Allowable range for continuous operation is 2.0 to 10.0. Allowable pH range for cleaning is 1.8 to 11.0.

Water Quality for Cleaning & Diafiltration:

- **Turbidity and SDI:** Maximum feed turbidity is 1 NTU. Maximum feed SDI is 5.0 (15-minute test).
- **Guidelines:** Please refer to the KMS "Water Quality Guidelines for CIP and Diafiltration" for more detailed information.

Chlorine and Chemical Exposure:

- Adherence to cleaning and sanitizing procedures including chemical concentrations, pH, temperature, and exposure time is necessary to achieve maximum useful element life. Accurate records should be maintained.
- KMS standard cleaning procedures for dairy applications should be followed. Recommended chlorine exposure time at the defined conditions is 30 minutes per day.
- Residual chlorine concentration during cleaning cycle (CIP) should be 150 ppm @ pH 10.5 or higher. Chlorine concentration should never exceed 200 ppm.

- Chlorine should only be added to the cleaning solution after the pH has been adjusted to 10.5 or higher.
- Iron or other catalyzing metals in the presence of free chlorine or hydrogen peroxide will accelerate membrane degradation.
- Sanitizing should be done only after a complete cleaning cycle and with water of acceptable quality. Refer to cleaning instructions and feedwater quality technical bulletins.

Cationic Polymers and Surfactants:

HFK-131 membranes may be irreversibly fouled if exposed to cationic (positively charged) polymers or surfactants. Exposure to these chemicals during operation or cleaning is not recommended and will void the warranty.

Lubricants:

For element installation, use only water or glycerin to lubricate seals. The use of petroleum or vegetable-based oils or solvents may damage the element and will void the warranty.

Supplemental Technical Bulletins:

- UF Element Cleaning Procedures
- Water Quality Guidelines for CIP and Diafiltration

Service and Ongoing Technical Support:

KMS has an experienced staff available to assist end-users and OEM's for optimization of existing systems and development of new applications. KMS also offers a complete line of KOCHKLEEN® membrane pretreatment, cleaning, and maintenance chemicals.

KMS Capability

KMS is the leader in crossflow membrane technology, manufacturing reverse osmosis, nanofiltration, microfiltration, and ultrafiltration membranes and membrane systems. The industries we serve include food, dairy and beverage, semiconductors, automotive, water and wastewater, chemical and general manufacturing. KMS adds value by providing top quality membrane products and by sharing our experience in the design and supply of thousands of crossflow membrane systems worldwide.

The information contained in this publication is believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance. We assume no responsibility, obligation or liability for results obtained or damages incurred through the application of the information contained herein. Refer to Standard Terms and Conditions of Sale and Performance Warranty documentation for additional information.

Koch Membrane Systems, Inc., www.kochmembrane.com

Corporate Headquarters: 850 Main Street, Wilmington, Massachusetts 01887-3388, US, Tel. Toll Free: 1-888-677-5624, Telephone: 1-978-694-7000, Fax: 1-978-657-5208
European Headquarters: Koch Chemical Technology Group Ltd., Units 3-6, Frank Foley Way, Stafford ST16 2ST, GB, Telephone: +44-178-527-2500, Fax: +44-178-522-3149

• Aachen DE • Lyon FR • Madrid ES • Milan IT • Wijnegem BE • Beijing & Shanghai CN • Mumbai & New Delhi IN • Melbourne & Sydney AU • Singapore • Sao Paulo BR • Dubai UAE •

For related trademark information, visit www.kochmembrane.com
Koch Membrane Systems, Inc. is a Koch Chemical Technology Group, LLC company.
© 2015 Koch Membrane Systems, Inc. All rights reserved worldwide.

01/15 Rev 15-1