

8" "DROP IN" ELEMENT: 8040 PLUS M183-LPHN

High Productivity E-Coat Ultrafiltration Spiral Element

PRODUCT DESCRIPTION


KMS Part Number:	0750791
Membrane Chemistry:	PVDF
Membrane Type:	HFM (Positive charge)
Membrane Area:	330 ft ² (30.7 m ²)
Construction:	Spiral wound element with hard overwrap and O-ring seal
Seal:	EPDM
Feed Spacer Thickness:	0.030" (0.76 mm)

OPERATING AND DESIGN INFORMATION*

Maximum Inlet Pressure:	80 psi @ 125°F (5.5 bar @ 52°C)
Minimum Outlet Pressure:	10 psi (0.7 bar)
Maximum Operating Temperature:	125°F (52°C)
Allowable pH – Continuous Operation:	2 – 10 @ 125°F (52°C)
Allowable pH – Short Term Cleaning:	1.5 – 10.5 @ 125°F (52°C)
Maximum Feed Side Pressure Drop:	35 psi @ 125°F (2.4 bar @ 52°C)
Maximum Permeate Pressure:	5 psi (0.3 bar)

* Consult Process Engineering Group for specific information

NOMINAL DIMENSIONS

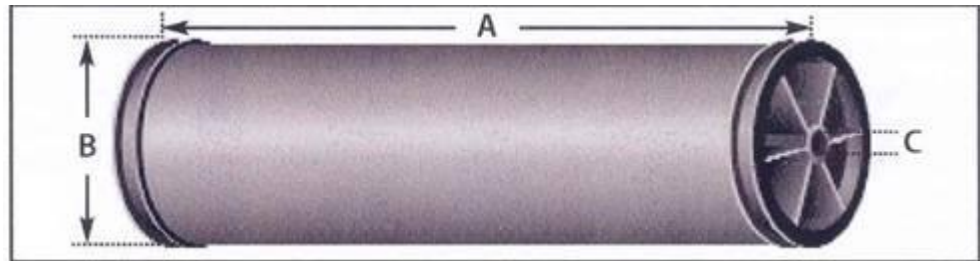

Part Number	Model	A inches (mm)	B* inches (mm)	C inches (mm)
0750791	8040 PLUS M183-LPHN	40 (1016)	7.9 (201)	1.29 (32.8)

* - Element diameter with brine seal is 8.0 inches.

MEMBRANE INCOMPATIBILITY

Prior to exposing the membrane to any chemical, the chemical should be reviewed by Koch Membrane Systems. Aside from the listed chemicals below, synthetic coolants, semi-synthetic coolants, kerosenes, naphtha, gasoline, floc polymers may affect membrane performance.

Chemicals that should be avoided include the following:

Aprotic Solvent (e.g., Dimethyl Formamide, Dimethyl Acetamide, N-Methyl Pyrolidine, etc.)

Chlorinated Solvents (e.g. Methylene Chloride, Chloroform, Carbon Tetrachloride, etc.)

Ketones (e.g. Acetone, Diacetone Alcohol, etc.)

Silicones or Silicone based Defoamers (e.g. Siloxane)

SERVICE AND ONGOING TECHNICAL SUPPORT

Koch Membrane Systems, Inc. has an experienced staff of professionals available to assist end-users and OEMs for optimization of existing systems and support the development of new applications. Along with the availability of supplemental technical bulletins, Koch Membrane Systems, Inc. also offers a complete line of KOCHKLEEN™ cleaning chemicals.

The information contained in this publication is believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance. We assume no responsibility, obligation or liability for results obtained or damages incurred through the application of the information contained herein. Refer to Standard Terms and Conditions of Sale and Performance Warranty documentation for additional information.

Koch Membrane Systems, Inc., www.kochmembrane.com

Corporate Headquarters: 850 Main Street, Wilmington, Massachusetts 01887-3388 USA. Tel.: 1-888-677-KOCH.

For related trademark information, visit www.kochmembrane.com/legal

Koch Membrane Systems, Inc. is a Koch Chemical Technology Group, LLC company.

© 2018 Koch Membrane Systems, Inc. All rights reserved worldwide.

07/18 Rev 18-2